

TECHNICAL DATA SHEET

Matty corona treated one side, other side heat sealable, base film for thermal lamination.

PRODUCT DESCRIPTION

Chiripal Poly Films MTL is Matt non treated one side, other side glossy non treated heat sealable, excellent clarity, gloss properties for use in extrusion coating application. The corona treated side is designed for printing and lamination.

PRODUCT FEATURES


- Excellent dispersion
- Excellent Matty appearance
- Excellent anchorage of extrusion coating
- Excellent processability during extrusion coating
- Good surface treatment retention
- Good mechanical properties
- Good dimensional stability

APPLICATIONS

- Base film for thermal lamination
- Extrusion coating

* Available in inside / outside corona treated as per customer requirement

SHEET STRUCTURE

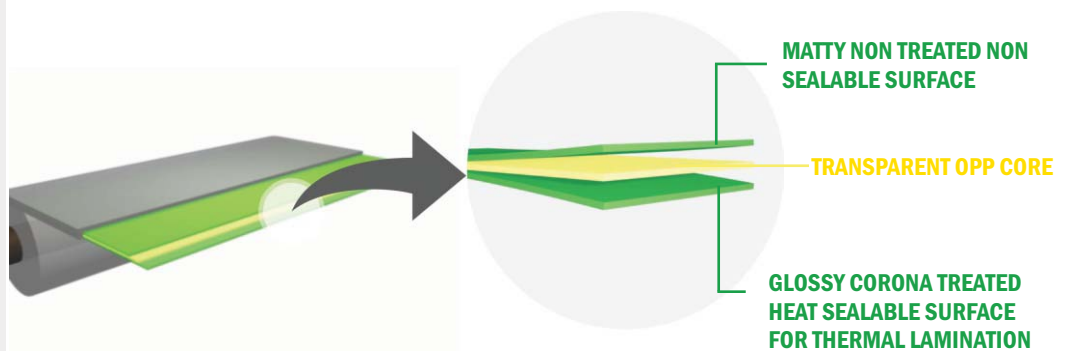

TECHNICAL INFORMATION

PROPERTIES	TEST METHOD	UNIT	CB10NI-MTL	CB12NI-MTL	CB15NI-MTL
Nominal Thickness (±3.0%)	ASTM D-374	Micron	10	12	15
		(Gauge)	40	48	60
Unit weight	Internal	gm/m ²	8.8	10.4	13.0
Yield	Internal	m ² /kg	113.6	96.2	76.9
Treatment Level	ASTM D-2578	dyne/cm	38 min		
Coefficient of Friction	ASTM D-1894	Kinetic (NT/NT)	0.40-0.45		
Haze	ASTM D-1003	%	>75		
Gloss (matt side) at 45°	ASTM D-2457	-	<10		
Tensile Strength at Break	ASTM D-882	kg/cm ²	MD	1100	
			TD	2200	
		(KPsi)	MD	15.6	
			TD	31.2	
Elongation at Break	ASTM D-882	%	MD	200	
			TD	80	
Thermal Shrinkage (at 120°C / 5 min)	Internal	%	MD	<5.0	
			TD	<3.0	
Heat Seal Temp. (NT side)	Internal	°C	100		
Sealing Strength (NT side) (120°C / 2 Bar/1 sec)	Internal	gm/25mm	>350		

MD – Machine Direction, TD – Transverse Direction, NT– Non Treated

FOOD CONTACT

Chiripal Poly Films complies with EC and FDA regulations. Specific document and MSDS are available on request.

STORAGE & HANDLING

Chiripal Poly Films do not require special storage conditions. A storage temperature below 30°C & humidity 55±5 % is recommended in order to avoid any deterioration of the film surface properties. Excess humidity and heat can cause problem such as fast treatment decay, film becomes more hazy / slippery which can affect the quality of printing and coating. It is advisable to use the material on FIFO basis. The film should be conditioned in operating environment for 24 hours before any kind of processing. CP-Films is best suitable for use up to 6 months from date of production.

DISCLAIMER

The property given in the technical data sheet do not constitute product specification but represent typical performance values based on the best of our knowledge and believed to be accurate. These are given in good faith but it is for the customer to satisfy of the suitability for its own particular purpose. The user is solely responsible for the end use of the product and needs to perform their own tests to confirm the product suitability / compatibility in all respects. Chiripal Poly Films Ltd. does not guarantee the typical values. Chiripal Poly Films Ltd. reserves the right to change the technical data sheet at any time for enhancing the quality of the products without prior information.