

## TECHNICAL DATA SHEET

Metallised high barrier film with one side corona treated, other side heat sealable for conversion.

## PRODUCT DESCRIPTION

CP-Films HMB is high barrier metallised BOPP film having metal deposited on treated side and heat sealable on other side. Metallised side is specifically designed to provide excellent surface treatment retention. The non treated heat-seal surface have good seal strength and sealing range which gives optimum performance on wide range of packaging machines. The film exhibits very high water and gas barrier.

## PRODUCT FEATURES


- Excellent moisture and gas barrier
- Excellent aluminum adhesion to film
- Excellent treatment retention
- Excellent metal appearance
- Good hot-tack and seal integrity
- Good stiffness & mechanical Properties
- High surface gloss
- Consistent slip properties

## APPLICATIONS

- Packaging application for very high barrier
- Conversion application for single / two ply packing structure
- Snack food packaging and FFS machine
- Printing / Lamination

\*Available in inside / outside corona treated as per customer requirement

## SHEET STRUCTURE

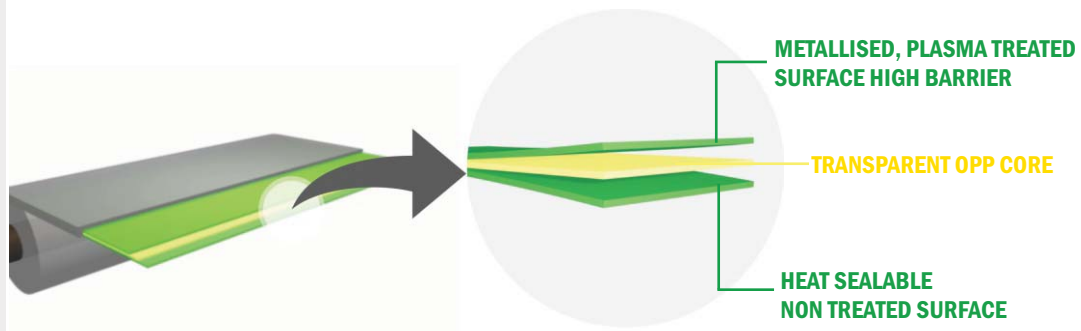

## TECHNICAL INFORMATION

PROPERTIES	TEST METHOD	UNIT	CB15HI-MB	CB18HI-MB	CB20HI-MB	CB25HI-MB	CB30HI-MB	CB35HI-MB	CB40HI-MB
Nominal Thickness (±3.0)	ASTM D-374	Micron	15	18	20	25	30	35	40
		(Gauge)	60	72	80	100	120	140	160
Unit weight	Internal	gm/m <sup>2</sup>	13.5	16.2	18.0	22.5	27.1	31.6	36.2
Yield	Internal	m <sup>2</sup> /kg	74.3	61.7	54.5	44.4	36.9	31.7	27.6
Coefficient of Friction	ASTM D-1894	Kinetic (NT/NT)	0.35-0.40						
Optical Density	ASTM D-1003	-	2.4-2.6						
Gloss at 45°	ASTM D-2457	-	90						
Tensile Strength at Break	ASTM D-882	kg/cm <sup>2</sup>	MD	1300					
			TD	2900					
		(KPsi)	MD	18.5					
			TD	41.2					
Elongation at Break	ASTM D-882	%	MD	180					
			TD	80					
Thermal Shrinkage (at 120°C / 5 min)	Internal	%	MD	<5.0					
			TD	<3.0					
Heat Seal Range (NT side)	Internal	°C	110-140						
Sealing Strength (NT side) (120°C / 2 Bar/1 sec)	Internal	gm/25mm	>400						
WVTR (38°C & 90% RH)	ASTM F-1249	gm/m <sup>2</sup> /day	0.32	0.30	0.30	0.25	0.25	0.25	0.25
		(gm/100in <sup>2</sup> /day)	0.02	0.02	0.02	0.016	0.016	0.016	0.016
OTR (23°C & 0% RH)	ASTM D-3985	cc/m <sup>2</sup> /day	42	40	40	38	38	35	35
		cc/100in <sup>2</sup> /day)	2.7	2.6	2.6	2.5	2.5	2.3	2.3

MD – Machine Direction, TD – Transverse Direction, NT – Non Treated

## FOOD CONTACT

Chiripal Poly Films complies with EC and FDA regulations. Specific document and MSDS are available on request.

## STORAGE & HANDLING

Chiripal Poly Films do not require special storage conditions. A storage temperature below 30°C & humidity 55±5 % is recommended in order to avoid any deterioration of the film surface properties. Excess humidity and heat can cause problem such as fast treatment decay, film becomes more hazy / slippery which can affect the quality of printing and coating. It is advisable to use the material on FIFO basis. The film should be conditioned in operating environment for 24 hours before any kind of processing. CP-Films is best suitable for use up to 6 months from date of production.

## DISCLAIMER

The property given in the technical data sheet do not constitute product specification but represent typical performance values based on the best of our knowledge and believed to be accurate. These are given in good faith but it is for the customer to satisfy of the suitability for its own particular purpose. The user is solely responsible for the end use of the product and needs to perform their own tests to confirm the product suitability / compatibility in all respects. Chiripal Poly Films Ltd. does not guarantee the typical values. Chiripal Poly Films Ltd. reserves the right to change the technical data sheet at any time for enhancing the quality of the products without prior information.